

355

CHURCH

FIELD BOOK

No. 385

Book No. 355

**BLACK HAWK COUNTY
ENGINEER'S OFFICE
COURT HOUSE
WATERLOO, IOWA 50703**

A

Index

C-438 (65) Bridge

Concrete


64


Piling Bearing


66 - 69

2-63
clean

//

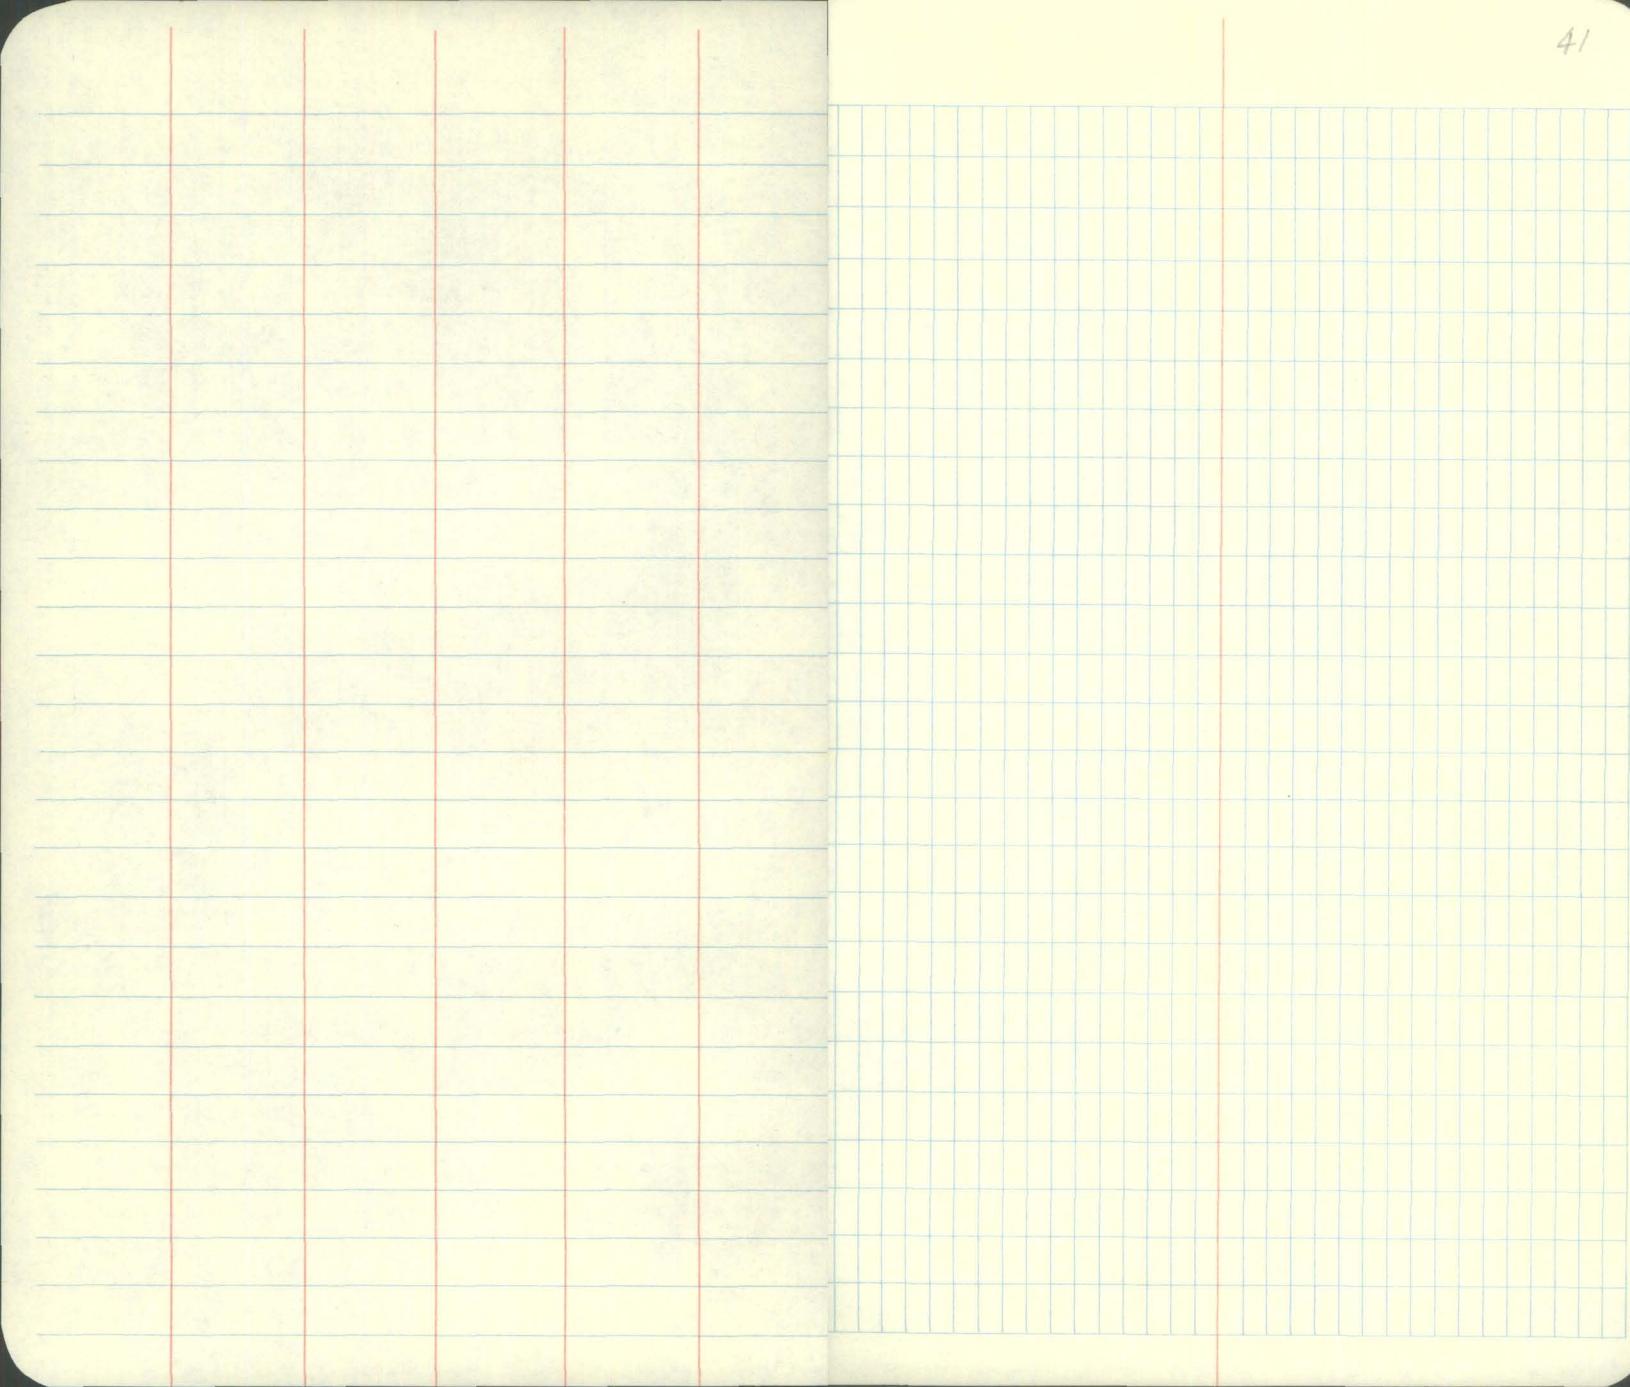

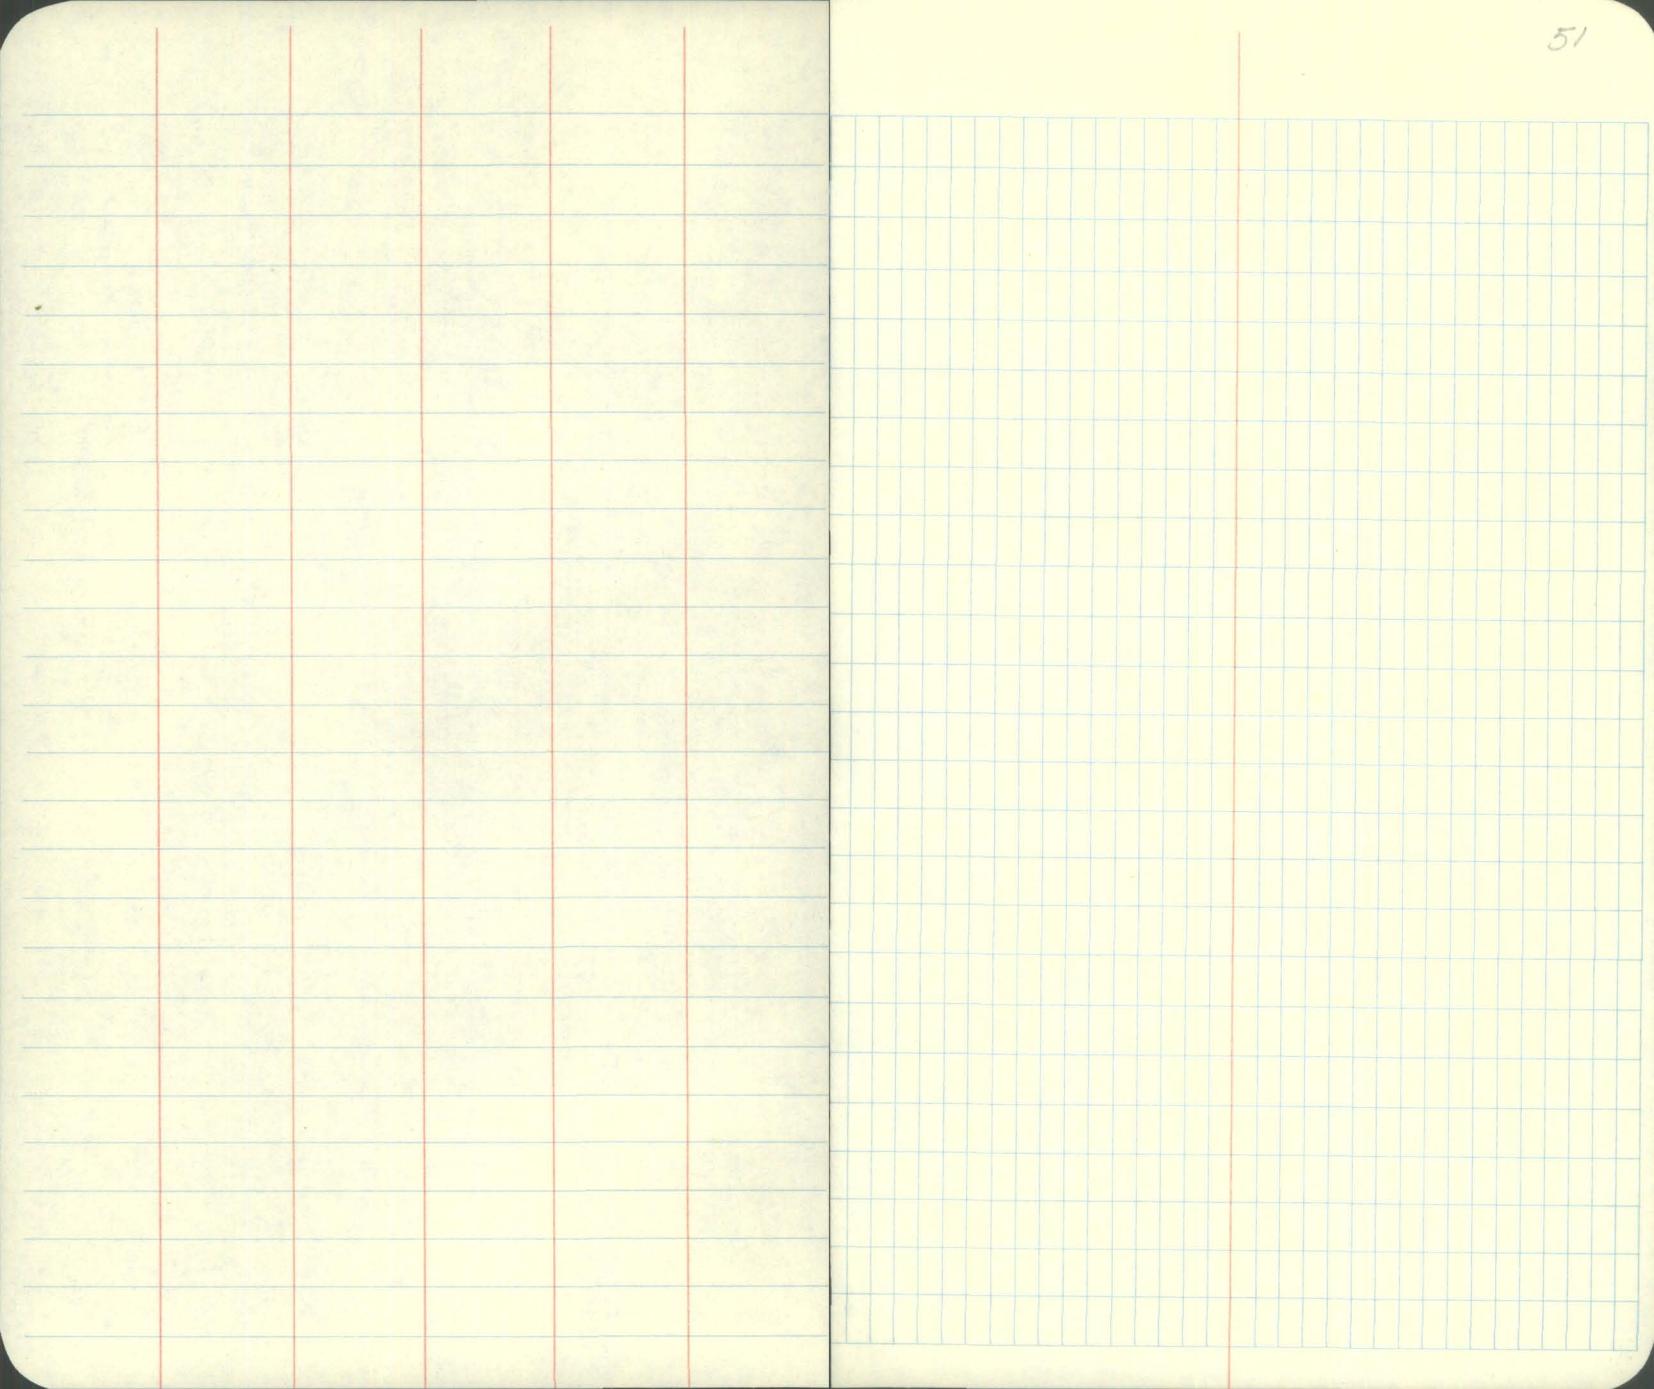

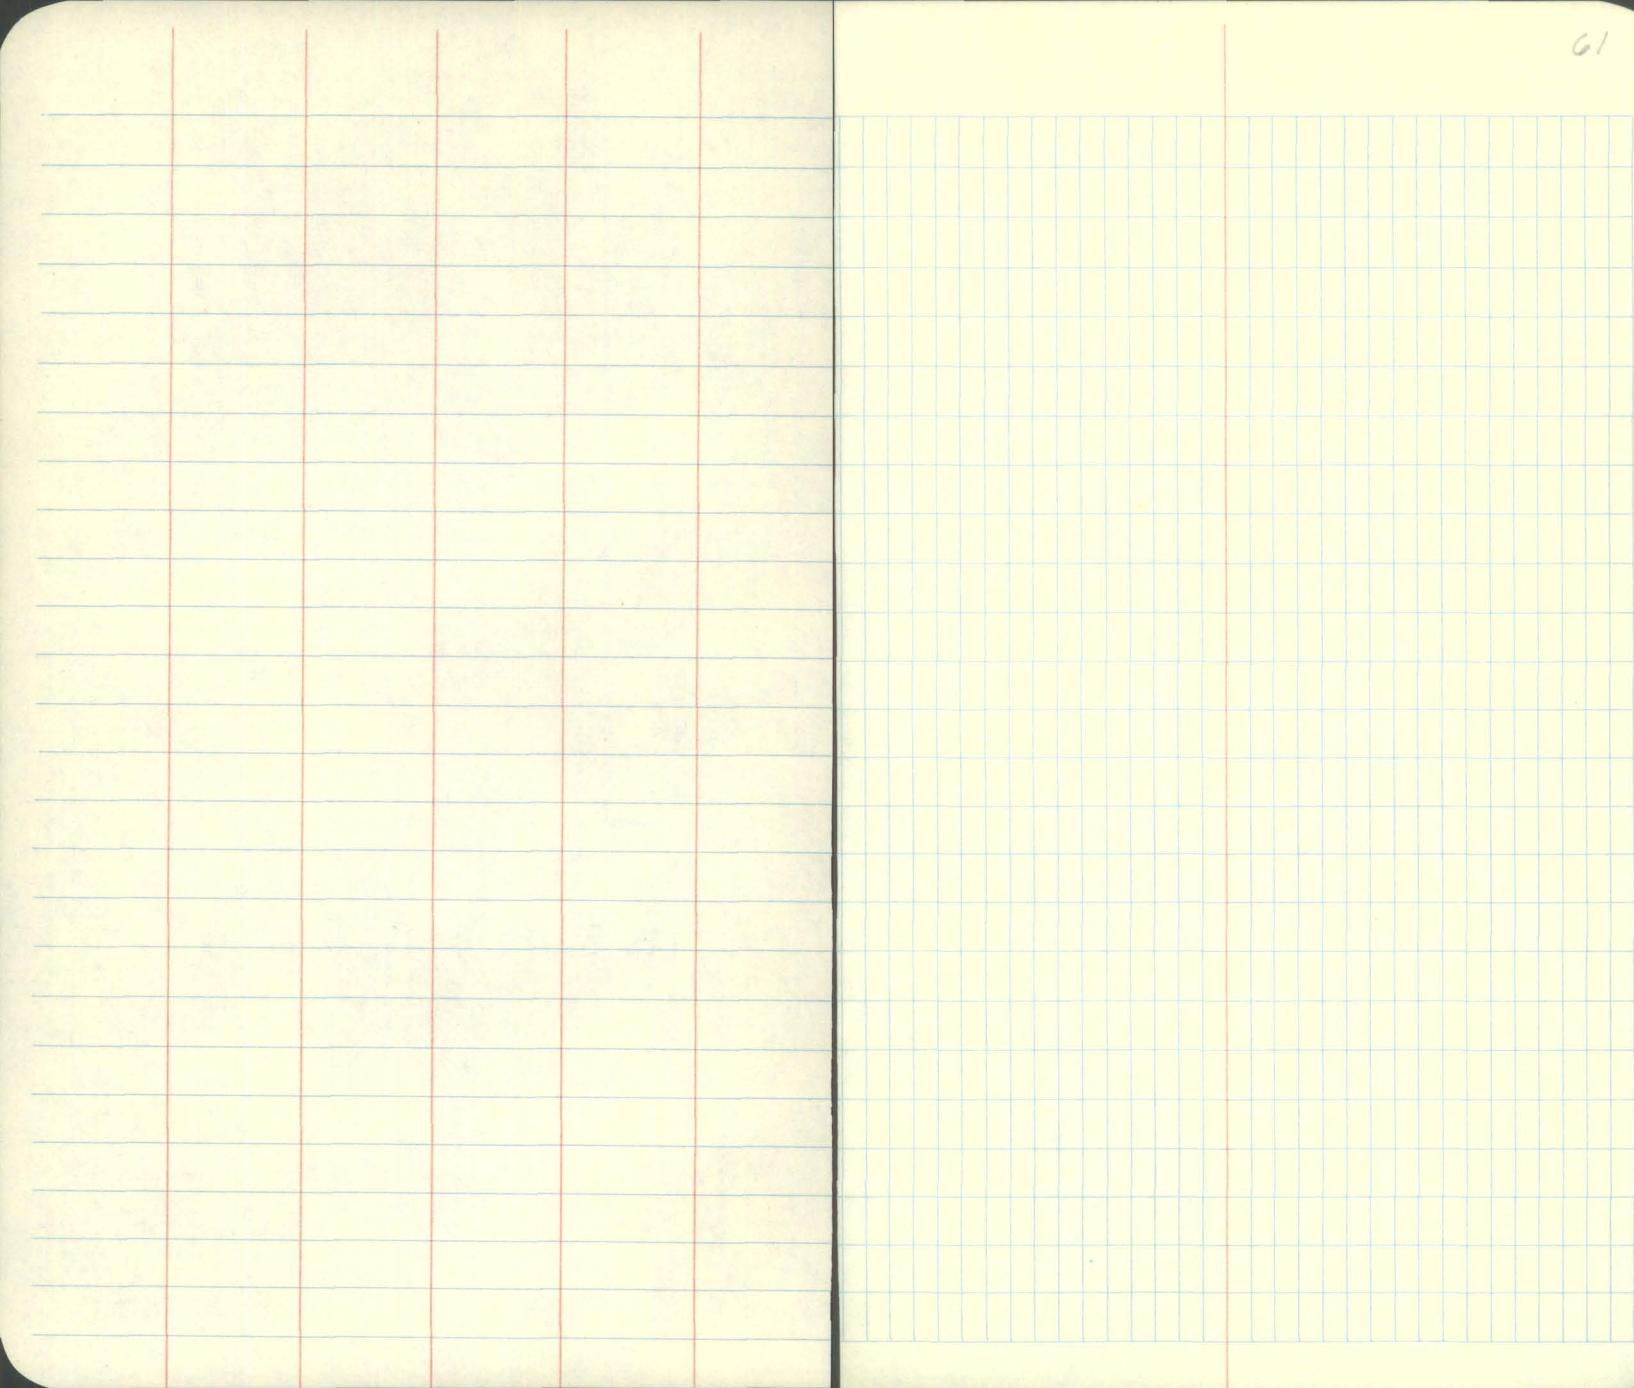

Concrete

8/20, 1965 Encasement E. Pier Pile No. 1-3-5-7-9
4 Cu. Yds. of Conc.

8/23 Encasement on E. Pier Pile No. 2-4-6-8
East Abut. Base
18 1/4 Yds.

8/26 E. Pier Cap & Wing Post Base East Abut
11 Cu. Yds.

8/27 Encasement on West Pier Pile No. 1-3-5-7-9
4 Cu. Yds.

8/31 Encasement on W. Pier Pile No. 2-4-6-8
West abut. Base
19 Cu. Yds.

West Pier Cap

9-29 superstructure

9-28 Placed Rt. Curb

9-29 Placed Lt Curb

710 Cement

1477 Sand

1450 Cillock

5 oz Dives

190# water added water

4 1/2% moist. in Sand

1 1/2% " " Cillock

BK #355

P. 64

Placed A.C. mate on E&W. Bridge epoch.

$$8.3 \quad \begin{array}{r} 23 \\ \hline 1920. \\ -166 \\ \hline 240 \end{array}$$

28

$$\begin{array}{r} 93 \\ 20 \\ \hline +1860 \\ +93 \\ \hline 121,60 \end{array}$$

4970

10339

10150

35 oz

1365 Water


$$\begin{array}{r} 6 \\ \hline 8460 \end{array}$$

Limestone screenings 96.56 Ton Del. used 92 Ton

East abutt.

66

Date	Pile No.	Cut off		Prop	Bearing
8-17-65	1	25'	2.9	0.15"	22.1 10'
	2	25'	2.2	0.18"	22.3 10'
	3	25'	2.8	0.15"	22.2 10'
	4	25'	2.1	0.20"	22.7 10'
	5	25'	2.6	0.19"	22.4 10'
	6	25'	2.6	0.18"	22.4 10'
	7	25'	2.7	0.20"	23.3 10'
	8	25'	2.4	0.15"	22.6 10'
	9	25'	2.2	0.29"	23.8 10'
	10	25'	3.0	0.10"	22.0 10'
			17.5		224.5

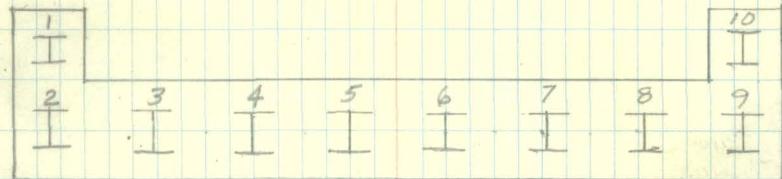

8/23 Placed Conc. in abut. Base

8/26 Placed Conc. in Wing Post base

~~East Pier~~

67

Date	Pile No.				Prop	Bear.
8/19	1	25'	1.8	0.20"	23.2	10' 56.1
8/19	2	25'	2.0	0.25"	23.0	51.4
8/18	3	25'	2.1	0.20"	22.9	56.1
8/18	4	25'	2.0	0.17"	23.0	59.3
8/18	5	25'	1.9	0.20"	23.1	56.1
8/18	6	25'	1.8	0.12"	23.2	55.5
8/18	7	25'	1.8	0.15"	23.2	61.5
8/19	8	25'	1.8	0.15"	23.2	61.5
8/19	9	25'	1.7	0.2"	23.3	56.1
			16.9		208.1	


- 1 2 3 4 5 6 7 8 9 -

8-20-65 Placed Conc. Encasement on Pile No. 1-3-5-7-9

8-23-65 Placed Conc. Encasement on Pile No 2-4-6-8

West Pier

68



Date	Pile No.	Cut off		Prop	Bearing
8/26	65	1	25'	1.3	0.06"
"	2	25'	1.6	0.18"	23.7 10° 74.3
"	3	25'	1.7	0.18	23.4 "
"	4	25'	1.8	0.12	23.3 "
"	5	25'	1.8	0.12	23.2 "
"	6	25'	1.6	0.12	23.4 "
"	7	25'	1.5	0.12	23.5 "
"	8	25'	1.2	0.18"	23.8 "
"	9	25'	0.7	0.16"	24.3 "
		225'	13.2		211.8

8-27-65 Placed Conc. Encasement Pile No. 1-3-5-7-9

8-31-65 Placed Conc. Encasement Pile No. 2-4-6-8

West abut.

69

Date	No.	Cut off		Drop	Bearing	
8-27-65	1	25'	2.0	0.20"	23.0	10' 56.1
	2	25' *	1.6	0.20"	23.4	10' 53.0
	3	25'	2.3	0.14"	22.7	10' 62.9
	4	25' *	1.5'	0.16"	23.5	10' 57.2
	5	25'	2.0	0.14"	23.0	10' 62.9
	6	25'	2.0	0.20"	23.0	10' 56.1
	7	25' *	1.3	0.20"	23.7	10' 53.0
	8	25'	2.0	0.18"	23.0	10' 57.1
	9	25' *	1.0	0.20"	24.0	10' 53.0
	10	25'	<u>1.7</u>	0.10"	23.3	10' 68.3
		250'	<u>17.4</u>		232.6	

8-31-65 Placed Conc. in abut. base

70-END
clean

IMPROVED TABLES AND INFORMATION

HORIZONTAL STADIA CORRECTIONS

2°—00'	—	0.1	21°—00'	—	12.8	33°—00'	—	29.7
3°—00'	—	0.3	21°—30'	—	13.4	33°—15'	—	30.1
4°—00'	—	0.5	22°—00'	—	14.0	33°—30'	—	30.5
5°—00'	—	0.8	22°—30'	—	14.7	33°—45'	—	30.9
6°—00'	—	1.1	23°—00'	—	15.3	34°—00'	—	31.3
7°—00'	—	1.5	23°—30'	—	15.9	34°—15'	—	31.7
8°—00'	—	1.9	24°—00'	—	16.5	34°—30'	—	32.1
9°—00'	—	2.5	24°—30'	—	17.2	34°—45'	—	32.5
10°—00'	—	3.0	25°—00'	—	17.9	35°—00'	—	32.9
10°—30'	—	3.3	25°—30'	—	18.6	35°—15'	—	33.3
11°—00'	—	3.6	26°—00'	—	19.2	35°—30'	—	33.7
11°—30'	—	4.0	26°—30'	—	19.9	35°—45'	—	34.1
12°—00'	—	4.3	27°—00'	—	20.6	36°—00'	—	34.6
12°—30'	—	4.7	27°—30'	—	21.3	36°—15'	—	35.0
13°—00'	—	5.1	28°—00'	—	22.0	36°—30'	—	35.4
13°—30'	—	5.5	28°—30'	—	22.8	36°—45'	—	35.8
14°—00'	—	5.9	29°—00'	—	23.5	37°—00'	—	36.2
14°—30'	—	6.3	29°—30'	—	24.3	37°—15'	—	36.6
15°—00'	—	6.7	30°—00'	—	25.0	37°—30'	—	37.1
15°—30'	—	7.2	30°—15'	—	25.4	37°—45'	—	37.5
16°—00'	—	7.6	30°—30'	—	25.8	38°—00'	—	37.9
16°—30'	—	8.1	30°—45'	—	26.2	38°—15'	—	38.3
17°—00'	—	8.5	31°—00'	—	26.5	38°—30'	—	38.7
17°—30'	—	9.0	31°—15'	—	26.9	38°—45'	—	39.1
18°—00'	—	9.5	31°—30'	—	27.3	39°—00'	—	39.6
18°—30'	—	10.1	31°—45'	—	27.7	39°—15'	—	40.0
19°—00'	—	10.6	32°—00'	—	28.1	39°—30'	—	40.5
19°—30'	—	11.2	32°—15'	—	28.5			
20°—00'	—	11.7	32°—30'	—	28.9			
20°—30'	—	12.3	32°—45'	—	29.3			

Chains to Feet

1	66
2	132
3	198
4	264
5	330
6	396
7	462
8	528
9	594
10	660

Feet to Chains

100	1.515
200	3.030
300	4.545
400	6.060
500	7.575
600	9.090
700	10.606
800	12.121
900	13.636
1,000	15.151

DIRECTIONS FOR USE OF TABLES

TABLE No. 1.

Distance of slope stake from side or shoulder stake for any width roadway, slope $1\frac{1}{2}$ to 1. If ground is nearly level, the cut or fill at side stake is located by the double entry method in left column and top row. The number in body of table in same row and column gives distance from side stake to slope stake. If ground is not level estimate the difference in elevation between the side stake and slope stake, lower target by this amount if cut, elevate if fill. Add this amount to cut or fill and find distance in table. Set up rod at this point, and line of sight should cut target. If it does not make the slight adjustment necessary.

TABLE No. 9.

To find Tangent and External for curve of any other degree, divide by degree of curve and add correction found in column of corrections.

Degree of curve with a given I may be found by dividing tangent, (or external), opposite I by given tangent, (or external).

The distance from a point on the tangent to the curve is very nearly the square of the tangent length divided by twice the radius.

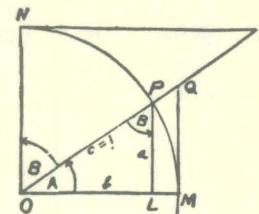


TABLE II
TRIGONOMETRIC FORMULÆ.

$$\angle A = \angle MOP \quad \angle B = \angle PON = \angle OPL \\ R = OP = c = 1$$

$$\sin A = \frac{a}{c} = \frac{a}{1} = a = \cos B = LP$$

$$\cos A = \frac{b}{c} = \frac{b}{1} = b = \sin B = OL$$

$$\tan A = \frac{a}{b} = \frac{MQ}{OM} = \frac{MQ}{1} = MQ = \cot B = MQ$$

$$\cot A = \frac{NT}{ON} = \frac{NT}{1} = NT = \tan B = NT$$

$$\sec A = \frac{OQ}{OM} = \frac{OQ}{1} = OQ = \csc B = OQ$$

$$\csc A = \frac{OT}{ON} = \frac{OT}{1} = OT = \sec B = OT$$

$$\text{vers } A = \frac{LM}{OP} = LM = \text{covers } B \#$$

$$\text{covers } A = \frac{OP - LP}{OP} = OP - LP = \text{vers } B$$

$$\text{exsec } A = PQ = \text{coexsec } B$$

$$\text{coexsec } A = PT = \text{exsec } B$$

$$\sin \frac{1}{2} A = \sqrt{\frac{1 - \cos A}{2}} \quad \cos \frac{1}{2} A = \sqrt{\frac{1 + \cos A}{2}}$$

$$\sin 2A = 2 \sin A \cos A \quad \cos 2A = \cos^2 A - \sin^2 A$$

$$\text{Law of Sines} \quad \frac{\sin A}{a} = \frac{\sin B}{b} = \frac{\sin C}{c}$$

$$\text{Law of Cosines} \quad c^2 = a^2 + b^2 - 2 ab \cos C$$

$$\text{Law of Tangents} \quad \frac{a+b}{a-b} = \frac{\tan \frac{1}{2}(A+B)}{\tan \frac{1}{2}(A-B)}$$

TABLE II—Continued
TRIGONOMETRIC FORMULAE (continued)

In any triangle:

Given a, b, C ; to find c, B, A .

Use Law of Sines.

Given A, B, c ; to find a, b, C .

Use Law of Sines.

Given a, b, c ; to find A, B, C .

$$\text{Let } \frac{a+b+c}{2} = s, \sqrt{\frac{(s-a)(s-b)(s-c)}{s}} = r$$

$$\cos \frac{1}{2}A = \sqrt{\frac{s(s-a)}{bc}}$$

$$\tan \frac{1}{2}A = \frac{r}{s-a}$$

$$\tan \frac{1}{2}B = \frac{r}{s-b}$$

$$\tan \frac{1}{2}C = \frac{r}{s-c}$$

Area of a triangle:

$$\text{Area} = \frac{1}{2}ab \sin C$$

$$\text{Area} = \sqrt{s(s-a)(s-b)(s-c)}$$

PRISMOIDAL FORMULA.

$$\text{Vol.} = \frac{h}{6}(B+b+4M)$$

h = altitude; B, b = bases; M = midsection

TABLE III
INCHES AND FRACTIONS OF AN INCH IN DECIMALS OF A FOOT

	0	1	2	3	4	5	6	7	8	9	10	11	
$\frac{1}{16}$.0052	.0885	.1719	.2552	.3385	.4219	.5052	.5885	.6719	.7552	.8385	.9219	$\frac{1}{16}$
$\frac{3}{16}$.0104	.0938	.1771	.2604	.3438	.4271	.5104	.5938	.6771	.7604	.8438	.9271	$\frac{3}{16}$
$\frac{5}{16}$.0156	.0990	.1823	.2656	.3490	.4323	.5156	.5990	.6823	.7656	.8490	.9323	$\frac{5}{16}$
$\frac{7}{16}$.0208	.1042	.1875	.2708	.3542	.4375	.5208	.6042	.6875	.7708	.8542	.9375	$\frac{7}{16}$
$\frac{9}{16}$.0260	.1094	.1927	.2760	.3594	.4427	.5260	.6094	.6927	.7760	.8594	.9427	$\frac{9}{16}$
$\frac{11}{16}$.0313	.1146	.1979	.2813	.3646	.4479	.5313	.6146	.6979	.7813	.8646	.9479	$\frac{11}{16}$
$\frac{13}{16}$.0365	.1198	.2031	.2865	.3698	.4531	.5365	.6198	.7031	.7865	.8698	.9531	$\frac{13}{16}$
$\frac{15}{16}$.0417	.1250	.2083	.2917	.3750	.4583	.5417	.6250	.7083	.7917	.8750	.9583	$\frac{15}{16}$
$\frac{17}{16}$.0469	.1302	.2135	.2969	.3803	.4635	.5469	.6302	.7135	.7969	.8802	.9635	$\frac{17}{16}$
$\frac{19}{16}$.0521	.1354	.2188	.3021	.3854	.4688	.5521	.6354	.7188	.8021	.8854	.9688	$\frac{19}{16}$
$\frac{21}{16}$.0573	.1406	.2240	.3073	.3906	.4740	.5573	.6406	.7240	.8073	.8906	.9740	$\frac{21}{16}$
$\frac{23}{16}$.0625	.1458	.2292	.3125	.3958	.4792	.5625	.6458	.7292	.8125	.8958	.9792	$\frac{23}{16}$
$\frac{25}{16}$.0677	.1510	.2344	.3177	.4010	.4844	.5677	.6510	.7344	.8177	.9010	.9844	$\frac{25}{16}$
$\frac{27}{16}$.0729	.1563	.2396	.3229	.4063	.4896	.5729	.6563	.7396	.8229	.9063	.9896	$\frac{27}{16}$
$\frac{29}{16}$.0781	.1615	.2448	.3281	.4115	.4948	.5781	.6615	.7448	.8281	.9115	.9948	$\frac{29}{16}$
1	.0833	.1667	.2500	.3333	.4167	.5000	.5833	.6667	.7500	.8333	.9167	1.000	1
	0	1	2	3	4	5	6	7	8	9	10	11	

TABLE IV
USEFUL RELATIONS.

Lineal feet	$\times .00019$	= miles
Lineal yards	$\times .0006$	= miles
Square inches	$\times .007$	= square feet
Square feet	$\times .111$	= square yards
Square yards	$\times .0002067$	= acres
Acres	$\times 4840$	= square yards
Cubic inches	$\times .00058$	= cubic feet
Cubic feet	$\times .03704$	= cubic yards
Links	$\times .22$	= yards
Links	$\times .66$	= feet
Feet	$\times 1.5$	= links

$$360^\circ = 21600' = 1296000"$$

Radius = arc of 57.2957790°

Arc of 1° (radius = 1) = .017453292

Arc of $1'$ (radius = 1) = .000290888

Arc of $1''$ (radius = 1) = .000004848

$$\pi = 3.141592654$$

$$\sqrt{\frac{1}{\pi}} = 0.564190$$

$$\frac{\pi}{4} = 0.785398163$$

$$\sqrt[3]{\frac{6}{\pi}} = 1.240700982$$

$$\frac{\pi}{6} = 0.523598776$$

$$\pi^2 = 9.869604401$$

$$\sqrt{\frac{4}{\pi}} = 1.128379167$$

$$\frac{1}{\pi^2} = 0.101321184$$

$$\frac{\pi}{3} = 0.523598776$$

$$\sqrt{\pi} = 1.772453851$$

$$\frac{4\pi}{3} = 4.188790205$$

$$\frac{1}{\pi} = 0.3183099$$

Curvature of Earth's surface = about 0.7 feet in 1 mile

Curvature in feet = 0.667 (Dist. in miles)²

Difference between arc and chord length, 0.05 feet in $11\frac{1}{2}$ miles

$$\text{Probable error of a single observation} = 0.6754 \sqrt{\frac{\Sigma v^2}{n-1}}$$

Error in chaining of 0.01 feet in 100 feet:

Due to—

1. Length of tape error of 0.01 feet

2. Alignment. One end 1.4 feet out of line

3. Sag of tape at centre of 0.61 feet.

4. Temperature difference of 15°

5. Difference of pull of 15 lbs.

STADIA REDUCTION FORMULE.

Horizontal Distance = $R - R \sin^2 a + C \cos a$

Vertical Distance = $R \frac{1}{2} \sin 2a + C \sin a$

distance from Object glass to cross hairs

$R = \text{Reading} \times \frac{\text{distance between cross hairs}}{\text{distance from Object glass to cross hairs}}$

$C = \text{distance from Object glass to cross hairs} + \text{distance from Object glass to center of instrument}$

$a = \text{angle of elevation for mid Reading}$

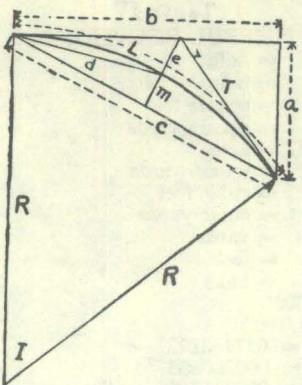


TABLE V
CURVE FORMULAE FOR SIMPLE CURVES
COMPILED BY J. CALVIN LOCKE, C.E.

$$(1) \ c = \sqrt{2Ra} \quad (2) \ c = \sqrt{a^2 + b^2}$$

$$(3) \quad c = \sqrt{2R(R - \sqrt{(R+b)(R-b)})} = \sqrt{2R(R - \sqrt{R^2 - b^2})}$$

$$(4) c = 2\sqrt{m(2R-m)}$$

$$(5) c = 2R \sin \frac{1}{2} I \quad (6) c = 2T \cos \frac{1}{2} I$$

$$(7) e = R \operatorname{exsec} \frac{1}{2} I$$

$$(8) e = R \tan \frac{1}{2} I \tan \frac{1}{4} I \quad (9) e = T \tan \frac{1}{4} I$$

$$(10) \quad b = \sqrt{a(2R-a)}$$

$$(11) \quad b = \sqrt{\left(c + \frac{c^2}{2R}\right)\left(c - \frac{c^2}{2R}\right)} = \sqrt{c^2 - \frac{c^4}{4R^2}}$$

$$(12) \quad b = R \sin I \quad (13) \quad b = a \cot \frac{1}{2} I$$

$$14) R = \frac{a^2 + b^2}{2a} = \frac{c^2}{2a} \quad (15) R = \frac{d^2}{2m} = \frac{c^2 + 4m^2}{8m}$$

$$16) d = \sqrt{R(2R - \sqrt{(2R+c)(2R-c)})} = \sqrt{R(2R - \sqrt{4R^2 - c^2})}$$

$$17) d = \sqrt{2Rm} \quad 18) d = 2R \sin \frac{1}{4} I \quad 19) m = \frac{d^2}{2R}$$

$$20) \quad m = R \mp \sqrt{\left(R + \frac{c}{2}\right)\left(R - \frac{c}{2}\right)} = R \mp \sqrt{R^2 - \frac{c^2}{4}}$$

$$(21) m = R \cos \frac{1}{4} I \quad (22) m = R \sin \frac{1}{4} I \tan \frac{1}{4} I \quad (23) m = \frac{1}{4} a \tan \frac{1}{4} I$$

$$24) \quad a = \frac{c^2}{R} \quad (25) \quad a = R - \sqrt{(R+b)(R-b)} = R - \sqrt{R^2 - b^2}$$

$$-1), \quad a = \frac{2R}{2R - 1}, \quad (25), \quad a = R, \quad \sqrt{(2R + 3)(R - 3)} = R, \quad \sqrt{R} = 1.$$

$$26) \quad a = 2 R (\sin^2 \frac{1}{2} I)^2 \quad 27) \quad a = R \text{ vers } I \quad 28) \quad a = R s$$

$$29) \quad a = b \tan \frac{1}{2} I \quad (30) \quad a = T \sin I \quad (31) \quad T = R \tan \frac{1}{2} I$$


$$32) \ I = \frac{L}{R} \times 57.295780 \quad (33) \ R = \frac{L}{I} \times 57.295780$$

$$R = \frac{1}{8d - c}$$

$$34) L = IR \times 0.01745329 \quad (35) L = \frac{\omega - c}{3}$$

$$36) \text{ Area Seg.} = \frac{LR - R^2 \sin I}{2} = \frac{LR - Rb}{2}$$

TABLE VI
SINES, COSINES, TANGENTS, COTANGENTS

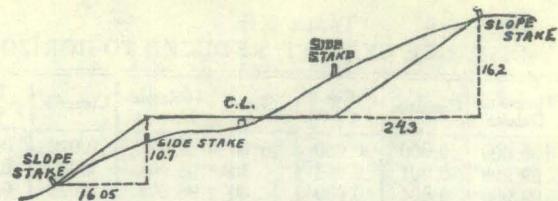

DISTANCES FROM SIDE STAKES FOR CROSS-SECTIONING.

SLOPE $1\frac{1}{2}$ TO 1. ROADWAY OF ANY WIDTH.

	0	.1	.2	.3	.4	.5	.6	.7	.8	.9	
0	0.00	0.15	0.30	0.45	0.60	0.75	0.90	1.05	1.20	1.35	0
1	1.50	1.65	1.80	1.95	2.10	2.25	2.40	2.55	2.70	2.85	1
2	3.00	3.15	3.30	3.45	3.60	3.75	3.90	4.05	4.20	4.35	2
3	4.50	4.65	4.80	4.95	5.10	5.25	5.40	5.55	5.70	5.85	3
4	6.00	6.15	6.30	6.45	6.60	6.75	6.90	7.05	7.20	7.35	4
5	7.50	7.65	7.80	7.95	8.10	8.25	8.40	8.55	8.70	8.85	5
6	9.00	9.15	9.30	9.45	9.60	9.75	9.90	10.05	10.20	10.35	6
7	10.50	10.65	10.80	10.95	11.10	11.25	11.40	11.55	11.70	11.85	7
8	12.00	12.15	12.30	12.45	12.60	12.75	12.90	13.05	13.20	13.35	8
9	13.50	13.65	13.80	13.95	14.10	14.25	14.40	14.55	14.70	14.85	9
10	15.00	15.15	15.30	15.45	15.60	15.75	15.90	16.05	16.20	16.35	10
11	16.50	16.65	16.80	16.95	17.10	17.25	17.40	17.55	17.70	17.85	11
12	18.00	18.15	18.30	18.45	18.60	18.75	18.90	19.05	19.20	19.35	12
13	19.50	19.65	19.80	19.95	20.10	20.25	20.40	20.55	20.70	20.85	13
14	21.00	21.15	21.30	21.45	21.60	21.75	21.90	22.05	22.20	22.35	14
15	22.50	22.65	22.80	22.95	23.10	23.25	23.40	23.55	23.70	23.85	15
16	24.00	24.15	24.30	24.45	24.60	24.75	24.90	25.05	25.20	25.35	16
17	25.50	25.65	25.80	25.95	26.10	26.25	26.40	26.55	26.70	26.85	17
18	27.00	27.15	27.30	27.45	27.60	27.75	27.90	28.05	28.20	28.35	18
19	28.50	28.65	28.80	28.95	29.10	29.25	29.40	29.55	29.70	29.85	19
20	30.00	30.15	30.30	30.45	30.60	30.75	30.90	31.05	31.20	31.35	20
21	31.50	31.65	31.80	31.95	32.10	32.25	32.40	32.55	32.70	32.85	21
22	33.00	33.15	33.30	33.45	33.60	33.75	33.90	34.05	34.20	34.35	22
23	34.50	34.65	34.80	34.95	35.10	35.25	35.40	35.55	35.70	35.85	23
24	36.00	36.15	36.30	36.45	36.60	36.75	36.90	37.05	37.20	37.35	24
25	37.50	37.65	37.80	37.95	38.10	38.25	38.40	38.55	38.70	38.85	25
26	39.00	39.15	39.30	39.45	39.60	39.75	39.90	40.05	40.20	40.35	26
27	40.50	40.65	40.80	40.95	41.10	41.25	41.40	41.55	41.70	41.85	27
28	42.00	42.15	42.30	42.45	42.60	42.75	42.90	43.05	43.20	43.35	28
29	43.50	43.65	43.80	43.95	44.10	44.25	44.40	44.55	44.70	44.85	29
30	45.00	45.15	45.30	45.45	45.60	45.75	45.90	46.05	46.20	46.35	30
31	46.50	46.65	46.80	46.95	47.10	47.25	47.40	47.55	47.70	47.85	31
32	48.00	48.15	48.30	48.45	48.60	48.75	48.90	49.05	49.20	49.35	32
33	49.50	49.65	49.80	49.95	50.10	50.25	50.40	50.55	50.70	50.85	33
34	51.00	51.15	51.30	51.45	51.60	51.75	51.90	52.05	52.20	52.35	34
35	52.50	52.65	52.80	52.95	53.10	53.25	53.40	53.55	53.70	53.85	35
36	54.00	54.15	54.30	54.45	54.60	54.75	54.90	55.05	55.20	55.35	36
37	55.50	55.65	55.80	55.95	56.10	56.25	56.40	56.55	56.70	56.85	37
38	57.00	57.15	57.30	57.45	57.60	57.75	57.90	58.05	58.20	58.35	38
39	58.50	58.65	58.80	58.95	59.10	59.25	59.40	59.55	59.70	59.85	39
40	60.00	60.15	60.30	60.45	60.60	60.75	60.90	61.05	61.20	61.35	40
41	61.50	61.65	61.80	61.95	62.10	62.25	62.40	62.55	62.70	62.85	41
42	63.00	63.15	63.30	63.45	63.60	63.75	63.90	64.05	64.20	64.35	42
43	64.50	64.65	64.80	64.95	65.10	65.25	65.40	65.55	65.70	65.85	43
44	66.00	66.15	66.30	66.45	66.60	66.75	66.90	67.05	67.20	67.35	44
45	67.50	67.65	67.80	67.95	68.10	68.25	68.40	68.55	68.70	68.85	45
46	69.00	69.15	69.30	69.45	69.60	69.75	69.90	70.05	70.20	70.35	46
47	70.50	70.65	70.80	70.95	71.10	71.25	71.40	71.55	71.70	71.85	47
48	72.00	72.15	72.30	72.45	72.60	72.75	72.90	73.05	73.20	73.35	48
49	73.50	73.65	73.80	73.95	74.10	74.25	74.40	74.55	74.70	74.85	49
50	75.00	75.15	75.30	75.45	75.60	75.75	75.90	76.05	76.20	76.35	50

Computed by L. Leland Locke.

25

2.57

2.03

2.60

1.3

12.5

16.9

13.2

47.6

4.2

9.52

14.04

12.99.2