

BLACK HAWK COUNTY ENGINEERS OFFICE

PREPARED BY: BLACK HAWK COUNTY ENGINEERS OFFICE
316 E. FIFTH STREET, ROOM 211 WATERLOO, IOWA 50703

PH.# (319) 833-3008
FAX.# (319) 833-3139

SLSI 9-94
CERT 12-96

UNITED STATES PUBLIC LAND SURVEY CORNER CERTIFICATE OF
Land Survey Monuments situated in Section 33, Township 88 N,
Range 14 W, of the Fifth Principal Meridian, BLACK HAWK County, Iowa.
Previously recorded in Misc. Book N/A, Page N/A, in County Recorder's Office.

(Show reason for preparing this certificate, the evidence and detailed procedures used in establishing the corner positions and monumentation found or placed.)


Monument Description and Remarks: S. 1/4 CORNER SECTION 33-88-14.
FND. STD. WPA C.M. LOC. +/- 12" WEST OF N/S FENCE @ 4" ABOVE GROUND.
MONUMENT OBSERVED TRUED (VERTICAL) AND STABLE IN GREAT CONDITION.
CORNER RECOVERED TO ASSIST WITH ESTABLISHING CENTER OF SAID SECTION.
N. 1/4 CORNER SECTION 33-88-14: FND. STD. WPA C.M. LOC. 7" ABOVE
GROUND & +/- 6' (FEET) WEST OF OLD POST (COR. ?) w/ FENCE E/W/S.
MONUMENT OBSERVED TRUED (VERTICAL) AND STABLE IN GREAT CONDITION.
SET #5 x 28" L. REBAR 15" BELOW TOP OF C.M. (8" DEEP) ALONG N. FACE.
CORNER RECOVERED TO ASSIST WITH ESTABLISHING CENTER OF SAID SECTION.

PLAN - VIEW


(Show a minimum of three reference ties to durable physical objects, relevant monuments and physical conditions that will enable recovery of the corner.)

NOT TO SCALE

EST. S.M. TAG/NAIL
W. FACE 18" DEAD
DECID. LOC. W. OF
OLD FNC. @ 14" HT.

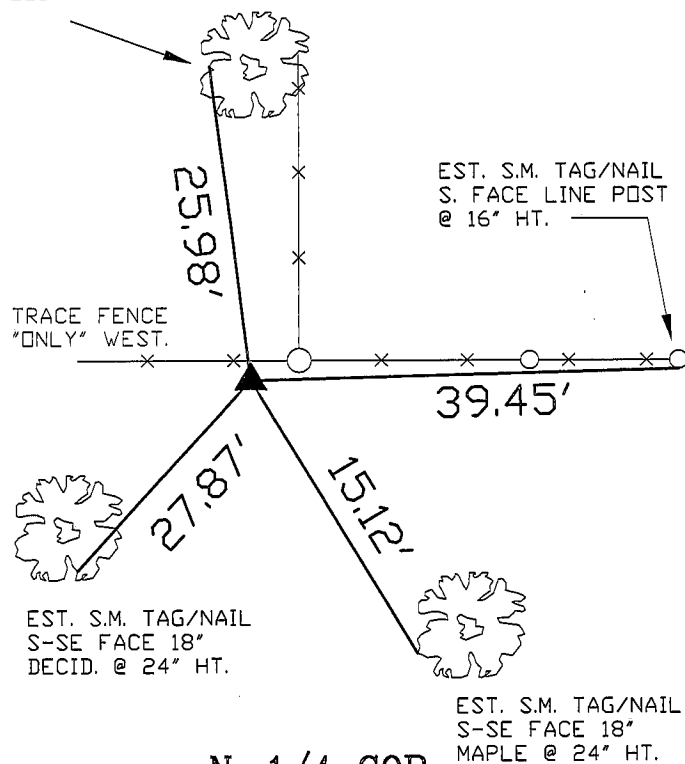NOTE: ALL TIE DISTANCES PLUMB
"S.M." DENOTES PLASTIC "SURVEY MARKER" TAG


N. 1/4 COR.

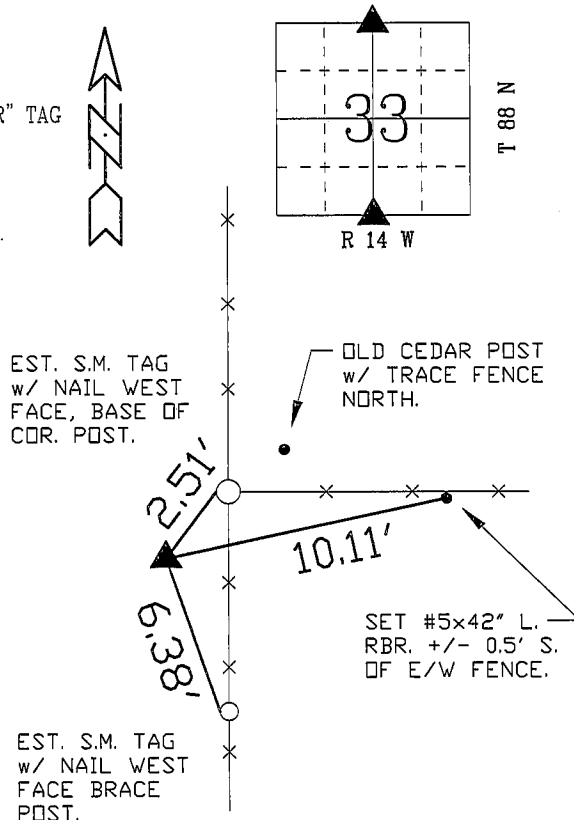

S. 1/4 COR.

FIELD SURVEY: G.T. & C.W. 11/22/04
PREPARED BY: G. TINKER 11/29/04

CERTIFICATION



I hereby certify that this land surveying document was prepared and the related survey work was performed by me or under my direct personal supervision and that I am a duly licensed Land Surveyor under the laws of the State of Iowa.

Geoffry Allen Tinker 11/29/04
Geoffry Allen Tinker (date)

License Number 15748

My license renewal date is December 31, 2004

Pages or sheets covered by this seal:

This Land Corner Certificate Only.

LIST CORNERS TO BE INDEXED

Corner	Section	Township	Range
N. 1/4	33	88 N	14 W
S. 1/4	28	88 N	14 W
S. 1/4	33	88 N	14 W
N. 1/4	04	87 N	14 W