



Doc ID: 003744950001 Type: GEN
Recorded: 04/20/2009 at 08:58:31 AM
Fee Amt: \$0.00 Page 1 of 1
Instr# 200800024242
Black Hawk County Iowa
JUDITH A MCCARTHY RECORDER
Book 1080 Page 33783 - 33783

File 2009-00019759

PREPARED BY: *BLACK HAWK COUNTY ENGINEERS OFFICE
316 E. FIFTH STREET, ROOM 211 WATERLOO, IOWA 50703

PH.# (319) 833-3008
FAX# (319) 833-3139

SLSI 9-94
CERT 12-98

UNITED STATES PUBLIC LAND SURVEY CORNER CERTIFICATE OF
Land Survey Monuments situated in Section 32, Township 89 N,
Range 14W, of the Fifth Principal Meridian, BLACK HAWK County, Iowa.
Previously recorded in Fee Book 2004, Page 13168, in County Recorder's Office.

(Show reason for preparing this certificate): The corner monument has been Replaced or Modified, per Ia. Code 355.11(1)(c)
(Evidence and detailed procedures used in establishing the corner position(s) and monumentation found or placed.)

Monument Description and Remarks: S. 1/4 COR. FND. #7 RBR. @ +/- H.M.A. C.L. JOINT. CORNER TEMP. REFERENCED PRIOR TO SCARIFICATION AND RUBBLIZATION OF EXISTING P.C.C. ROADWAY. AFTER RESURFACING PROJECT (7" DP. x 22' W. H.M.A. PAVEMENT ADDED) CORNER WAS RESET W/ 5/8" x 7" ± L. RBR. LOCATED 0.13' S. OF NEW H.M.A. C.L. JOINT.


NOTE: ALL DISTANCES PLUMB/HORIZ.
(H.D.), "UNLESS DENOTED".

PLAN VIEW
"NOT TO SCALE"

BHco Hist. Ties: BK. #1002 (32) 89-14
FIELD BOOK: BHco. #488 p.21

(Show a minimum of three reference ties to durable physical objects, relevant monuments and physical conditions that will enable recovery of the corner.)


- 1.) TIES PER EDM MEASURE IN NON-PRISM
MODE, WHILE UTILIZING "INDIRECT/MLM"
MEASURE.



T 89 N



R 14 W

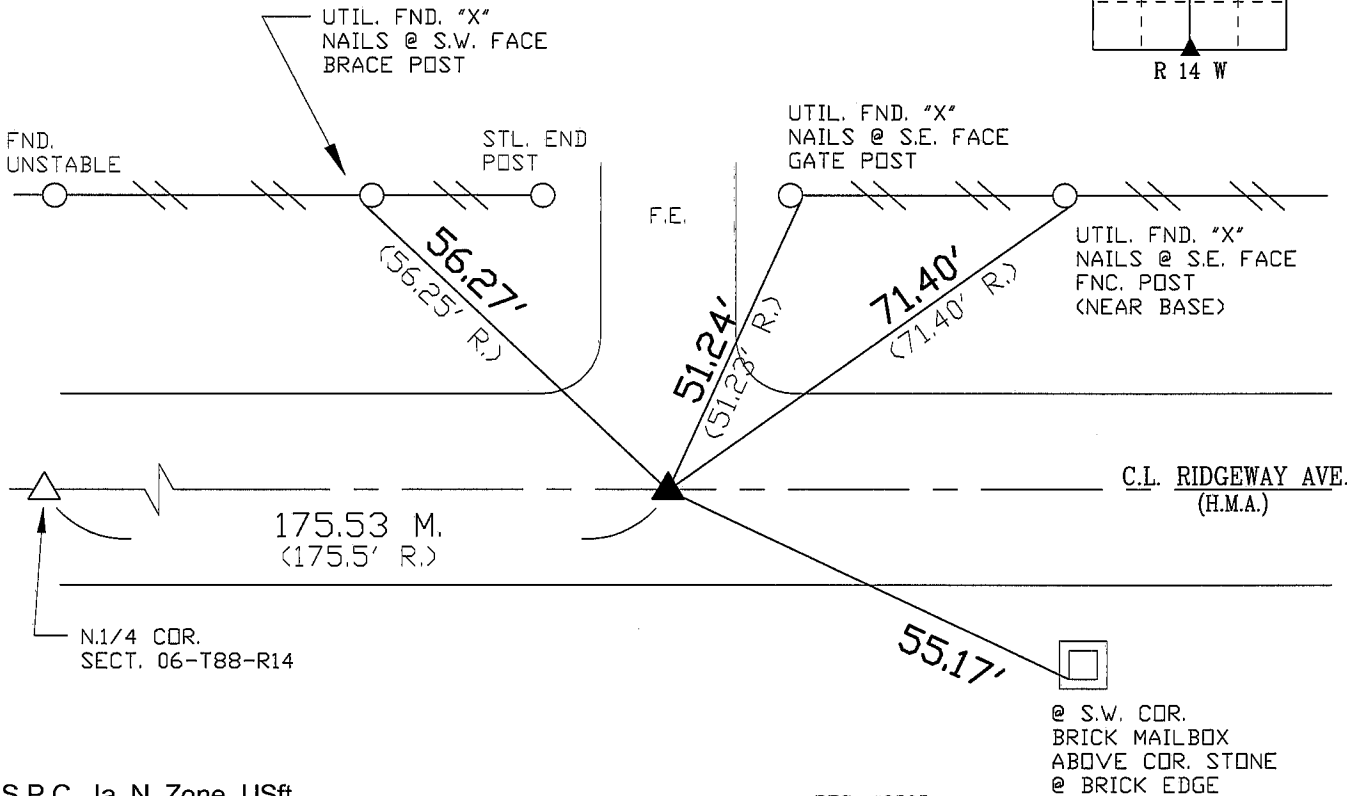

S.P.C., Ia. N. Zone, USft
N=3635690.356'
E=5184508.572'
(NAD83-2007 "BHco07", Static Obs.)

RES. #8505
(White w/ Brick Front)

FIELD SURVEY: G.T. 07/10/08
PREPARED BY: C.W./J.Z./G.T. 4/17/09

CERTIFICATION



I hereby certify that this land surveying document was prepared and the related survey work was performed by me or under my direct personal supervision and that I am a duly licensed Land Surveyor under the laws of the State of Iowa.

Geoffrey Allen Tinker 04/20/2009
Geoffrey Allen Tinker (date)

License Number 15748
My license renewal date is December 31, 2010
Pages or sheets covered by this seal:
This Land Corner Certificate Only.

LIST CORNERS TO BE INDEXED

Corner	Section	Township	Range
S. 1/4	32	89 N	14 W

INDEX OF ABBREVIATIONS

(M) = "Measured" Dimension
(P) = "Platted" Dimension
(R) = "Record" Dimension
(C) = "Calculated" Dimension
"IGS" = Iowa Geodetic Survey
"WPA" = Works Progress Admin. Survey
"G" = per George Miller Survey (BHco Surveyor 1858-1860)
"B" = per John Ball Survey (BHco Surveyor 1866-1891)
"N" = per Nathan Barber Survey (BHco Surveyor 1908-1931)
"NP" = Reflectorless EDM Meas.
"MLM" = Indirect Measure
"CM" = Concrete Monument
"SM" = Survey Marker Spike/Tag