

Sec. 16 E $\frac{1}{4}$ Cor.

Twp. Orange

Sec. 15 Twp. 88 Range 13

W $\frac{1}{2}$ Corner

Mon. 8" Deep

Plum
Tree

WSPK pow pole

WSPK tel. pole

Conc cor post


Power Pole
(X) SP South Gate
post.

WSPK 1/2 post

WSPK cor post

WSPK pow pole

(over)

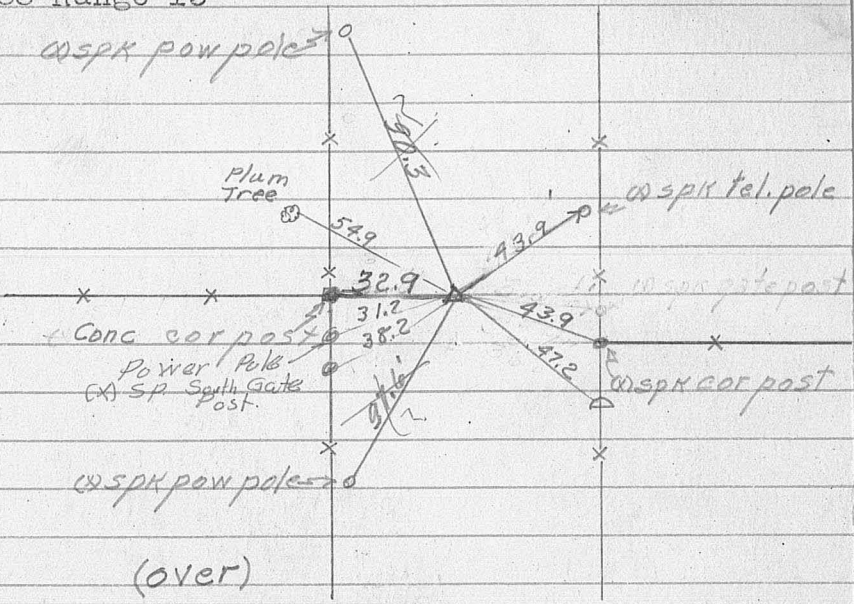

Dug and found nothing so established corner
using old Gov't Survey Records chaining
distances. Rerun section line N. from E $\frac{1}{4}$ Cor
Sec 21 (Identified Corner) to N.E. Cor. Sec 16
(Identified Corner) set nail on line. Rerun
 $\frac{1}{4}$ fc. Section 15 and 16 and set nail. Chained
N and S, and E and W and set nails. Distances
between all points was not over 18" so
proportioned and set monument.
Natural evidence, trees and fcs show
this to be the point,